

Simple to setup
Simple to use
Simply enjoy

Technical Specifications

- Only 1.88mm high!
- Blink, single or dual emitters types:
- Emitters have high output 940nm Infrared emission
- Visible White feedback LED
 - Black feedback cover pad supplied
- 3m cable with 3.5mm plug
- Micro sized low profile with a tiny footprint
- Strong acrylic adhesive mounts supplied including spares
- IR dispersion angle <math><25^\circ</math>
- Maximum current: 20mA
- Emitter Case dimensions
 - Width - 6.1mm
 - Length- 9.4mm
 - Height - 1.88mm



New Design



The AX-SIR1 and AX-SIR2 have been re-designed from the ground up. Featuring a new IR diode and a white feedback LED separated by the micro sized circuit board, IR bleed has virtually been eliminated.

Super Sticky

High grade 3M branded adhesive to keep the emitter right where you need it.

Slim line

Super slim profile means the emitter blends into the device you are controlling. This not only looks great but eliminates the risk of the emitter being accidentally knocked out of place.

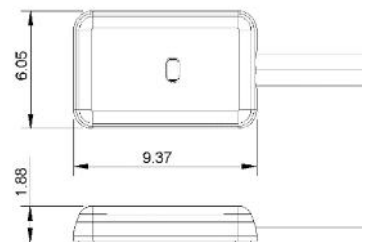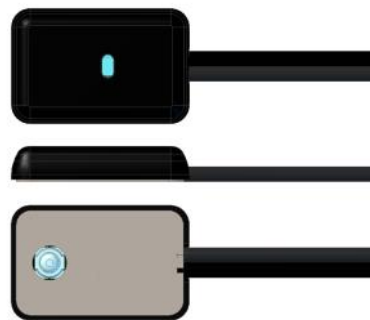

Specifications and features subject to change without notice. Please check www.axiumcontrol.com for latest updates

Axium

Unit 14, 49 Sainsbury Rd, Morningside, Auckland, New Zealand

P: +64 (9) 3774600

E: sales@axium.co.nz

www.axiumcontrol.com