


Welcome to the plug and play & renaming zones & source setup for an Axiom Mini4 or AX-1250 Amplifier with the AX-AMM Media Manager.



Axiom

Audio & Control
Systems

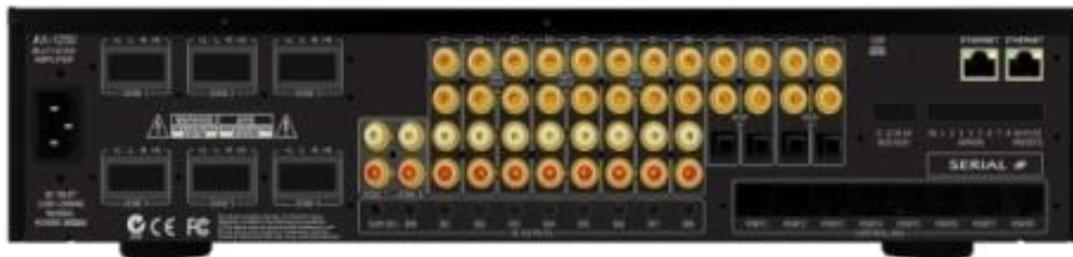

Axiom Media Manager, Mini4, AX-1250

Your Mini 4, AX-1250 amplifier and AX-AMM need to be connected to the same Network.



There is no physical connection required between Axiom amps and AMM

Axiom

Audio & Control
Systems



Axium Media Manager, Mini4, AX-1250

Download the Free Axium app onto your mobile device, Navigate to either Google Play or the Apple App store and search for Axium.

The paid version is for systems without Axium hardware.



Axium

Audio & Control
Systems



Axium Media Manager, Mini4, AX-1250

Once discovered,
select Install



After installation launch the
Axium app icon on your
device.



The app will self detect the Axium
components on the network and
prepopulate your device with a self
discover mobile template, scaled to the
mobile device, in this case the 4 zones
from a Mini4. →

When not connected to a network a user
can run the demo mode.

Axiu m

Audio & Control
Systems



Axium Media Manager, Mini4, AX-1250

Press the S1
(source 1) label
for Zone 1



In this case you can see the AMM sources and the 8 available network streams from the Media Manager. These are available in all zones.




Axium

Audio & Control
Systems




Axiom Media Manager, Mini4, AX-1250

To start listening to say Tuneln or music from your mobile device, select a stream, in this example Stream 1

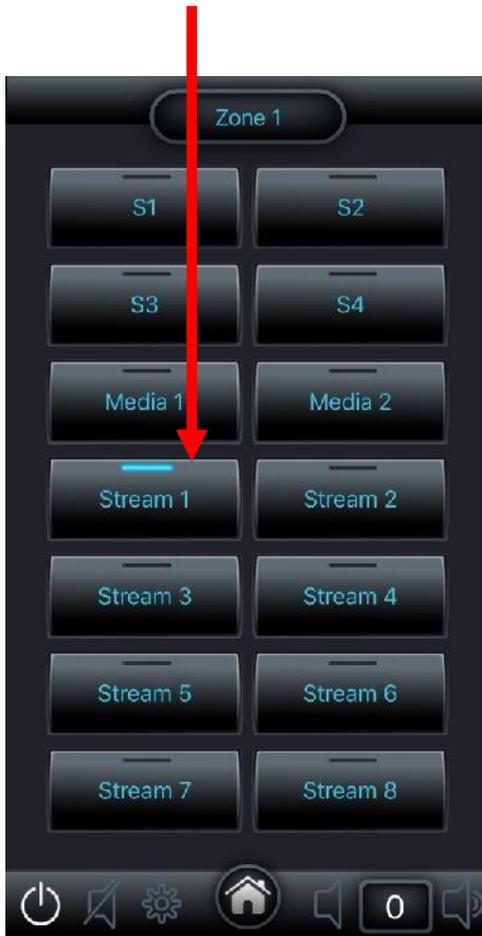

The window below will appear allowing you to make your selection from the menu for the music you want to play. Select from the prompts that appear after your selection.

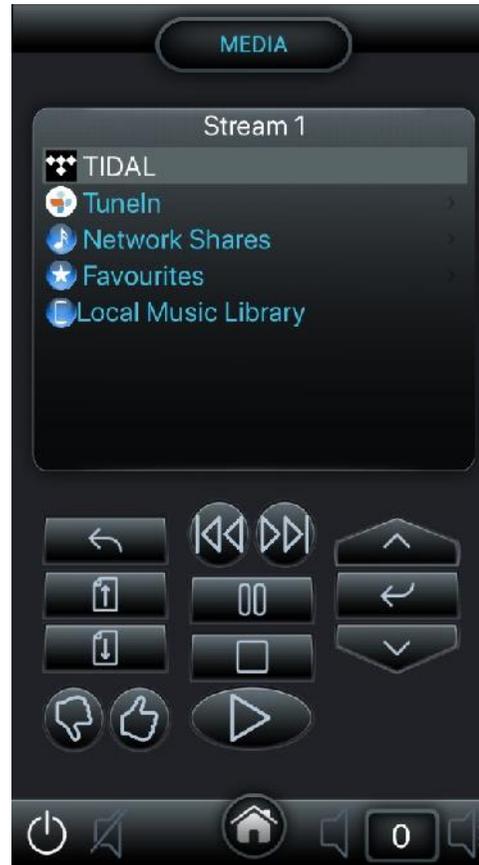

Axiom

Audio & Control
Systems



Axiom Media Manager, Mini4, AX-1250

In this example to listen to TuneIn radio, Either press the TuneIn name or use the scroll up/down arrows and select the enter button



Now you can start exploring from the list of options that appear.



Axiom

Audio & Control
Systems




Axiom Media Manager, Mini4, AX-1250


To access Spotify Connect, launch your Spotify App on your mobile device.



Select the music you want to listen to and start playing

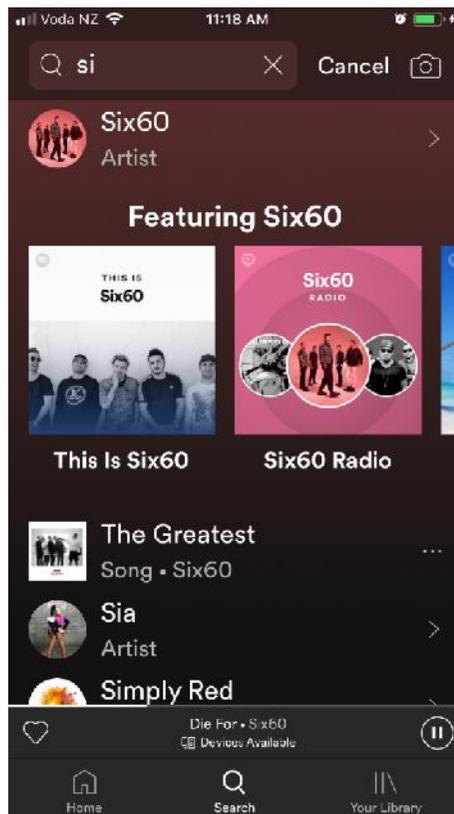

Press the Devices available tab to select a Zone

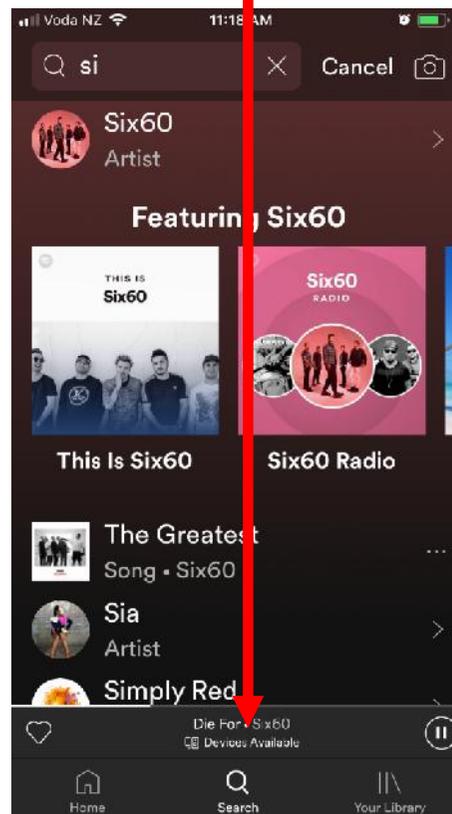


Audio & Control Systems




Axiom Media Manager, Mini4, AX-1250

Then Click on this symbol.
Some phones may have a different layout than that shown below.

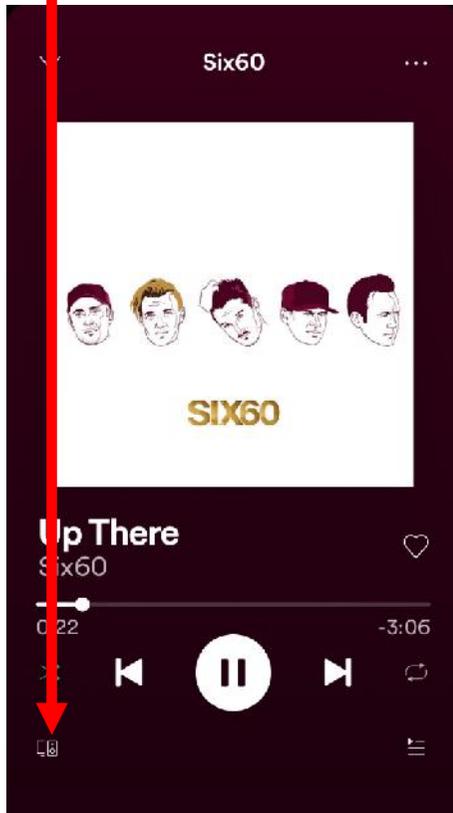

Select the Zone you want to have music playing.

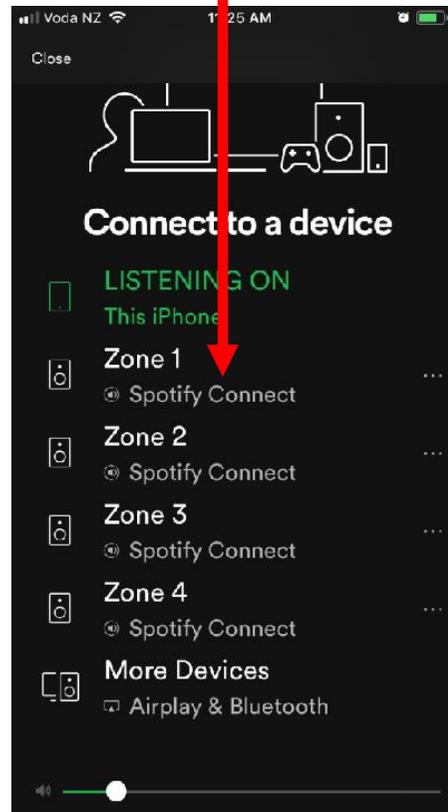

Use the Volume Up & Down buttons on your mobile device to control the amplifiers volume.


Axiom

Audio & Control
Systems





Axiom Media Manager, Mini4, AX-1250

To use Airplay, select More Devices.

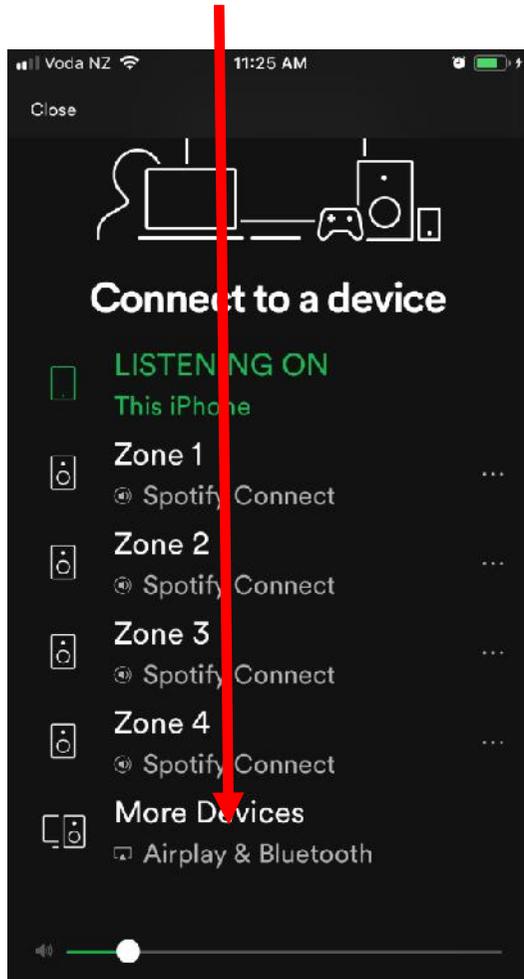


Again select the zone you want to listen in.

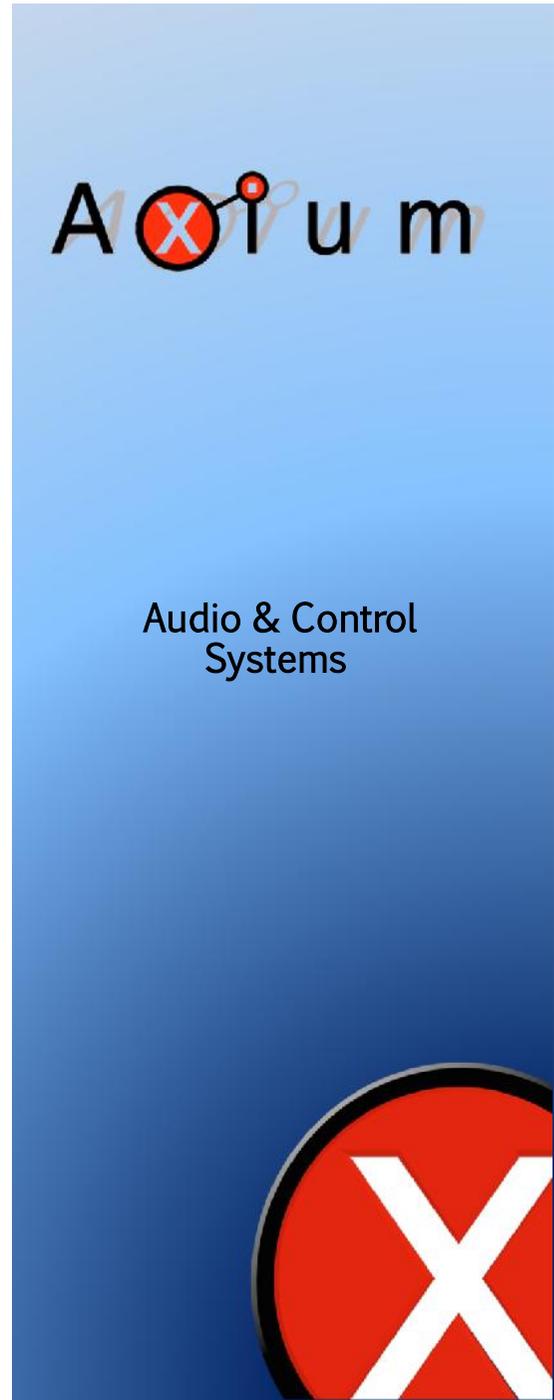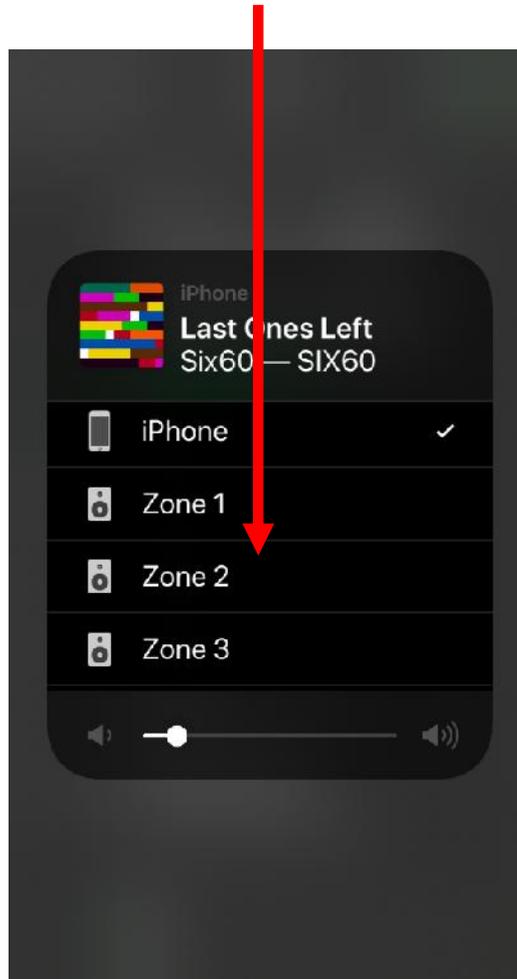


Renaming Zone and Source Names.
Ensure your mobile device is connected to the same network as the Axiom products.

Press S1 (source 1)

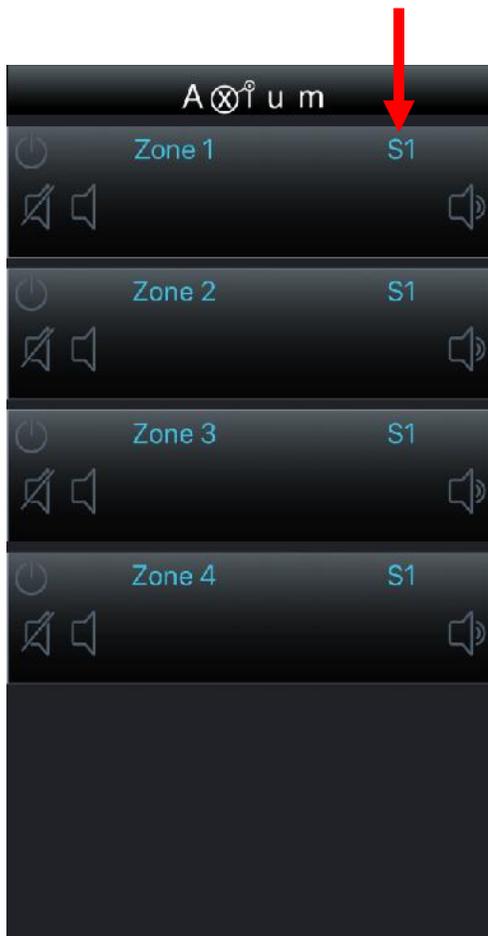


Then select the cog icon

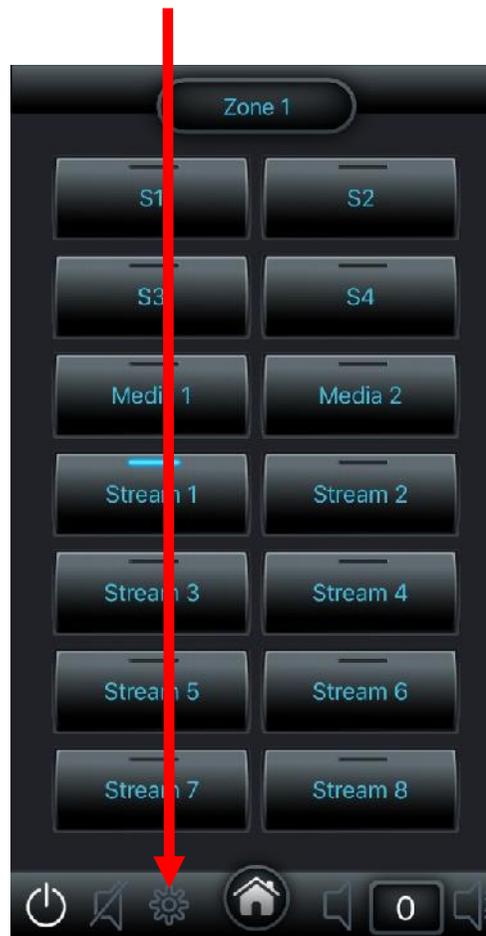

Axiom Media Manager, Mini4, AX-1250

Press the Axiom Symbol

Then select device config

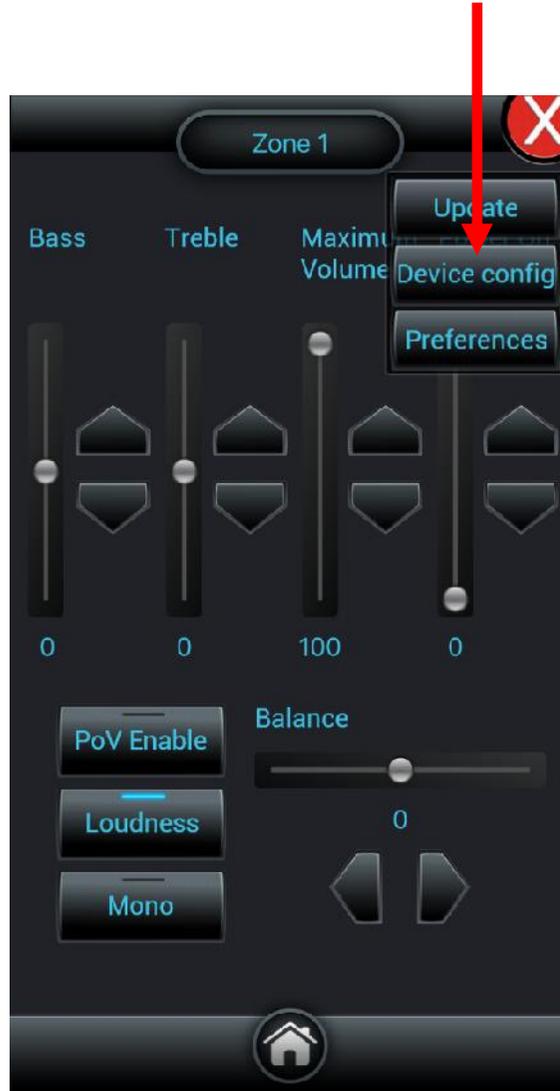

This will open the device settings Web page as below, select and press the Zone tab.



The screenshot shows the 'Device Settings' web page for an Axium device. The 'Zones' tab is selected and highlighted with a red arrow. The page is divided into two columns. The left column contains sections for 'Device Information', 'Wired Ethernet', 'Date and Time', 'Third Party Support', 'Airplay', 'Digital Audio I/O', and 'More Devices'. The right column contains sections for 'Device Information', 'Wired Ethernet', 'Date and Time', 'Third Party Support', and 'Digital Audio I/O'. The footer contains copyright information for Audio Engineering Ltd.

Control	Device	Zones	Sources	Media	IR Routing	Management
---------	--------	-------	---------	-------	------------	------------

Device Settings

Device Information

Model: AX-Mini4 (version 2)
Unit ID: 1655
Manufacture Date: 20/1/2017
Firmware Version: 3.2
Temperature: 30 °C (peak 30 °C)
IP Address: 192.168.100.202
MAC Address: 10:07:23:40:05:84

Wired Ethernet - 192.168.100.202

Network Name: STR4-1655
Connection: [Static Configuration (IP)]

Date and Time

Date: 22/10/2019, 12:52:43
NTP Server: [Dynamic Configuration (NTP)]
Observe DST: []

Third Party Support

KNX Interface: [Dynamic Configuration (KNX)]
HDANYWHERE MHJB: [Dynamic Configuration (MHJB)]
Video In/Out to Audio Source/Zone:
Video Input 1: [Dynamic Configuration (Video)]
Video Input 2: [Dynamic Configuration (Video)]
Video Input 3: [Dynamic Configuration (Video)]
Video Input 4: [Dynamic Configuration (Video)]
Video Output 1: [Dynamic Configuration (Video)]
Video Output 2: [Dynamic Configuration (Video)]
Video Output 3: [Dynamic Configuration (Video)]
Video Output 4: [Dynamic Configuration (Video)]

Airplay

Enable Airplay: []

Digital Audio I/O

Source 3: [Dynamic Configuration (Audio)]
Source 4: [Dynamic Configuration (Audio)]

More Devices

AX-AMM	192.168.100.205	"amm253"	[Configure]
--------	-----------------	----------	-------------

© Copyright 2011-2019 [Audio Engineering Ltd.](#) All rights reserved.





Audio & Control Systems



Axiom Mini4

You can now edit names. Tap on the zone name and type the new name i.e. Lounge, then select OK.

This will save the name in the amplifier.

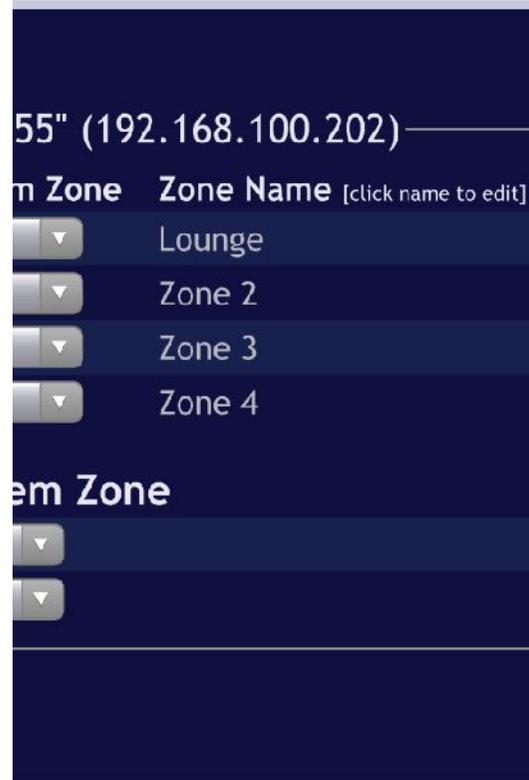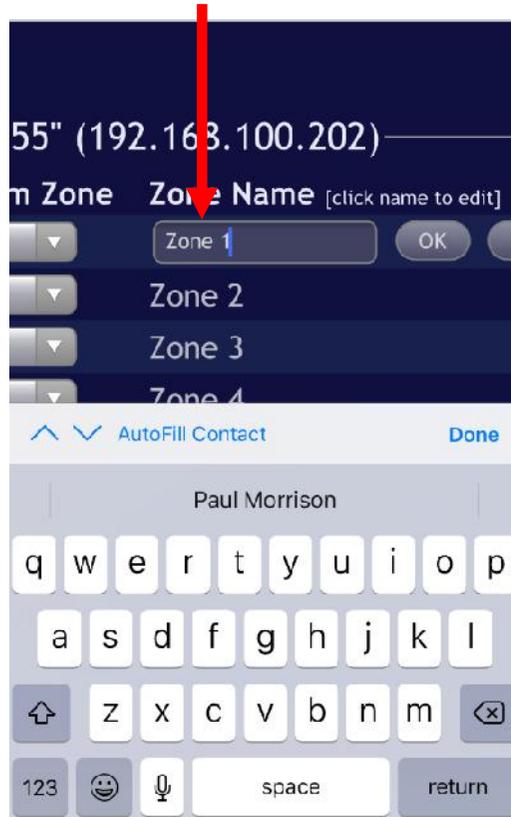

Repeat the previous steps for each of the remaining Zones until all your zones are re-named.

Untick zones not used so they don't appear in the mobile app.

Axiom

Audio & Control
Systems



Use the same process to rename sources.
Select the Source tab.




The screenshot shows the 'Sources' tab selected in the navigation menu. The interface is divided into two main columns: 'Device Settings' on the left and 'Device Information' on the right. The 'Device Settings' column contains several sections: 'Device Information' (Model: AX-Mini4, Unit ID: 1655, etc.), 'Wired Ethernet' (Network Name: STR4-1655), 'Date and Time' (Date: 22/10/2019), 'Third-Party Support' (KNX Interface, HDANYWHERE MHJD, Video In/Out to Audio Source/Zone), 'Airplay' (Enable Airplay), 'Digital Audio I/O' (Source 3, Source 4), and 'More Devices' (AX-AMM). The 'Device Information' column contains sections for 'Wired Ethernet', 'Date and Time', 'Third Party Support', and 'Digital Audio I/O'. A red 'X' logo is visible in the bottom right corner of the interface.



Audio & Control Systems



Tap on a source name and type in the new name i.e. Sky, then select OK. This will save the source name in the Amp

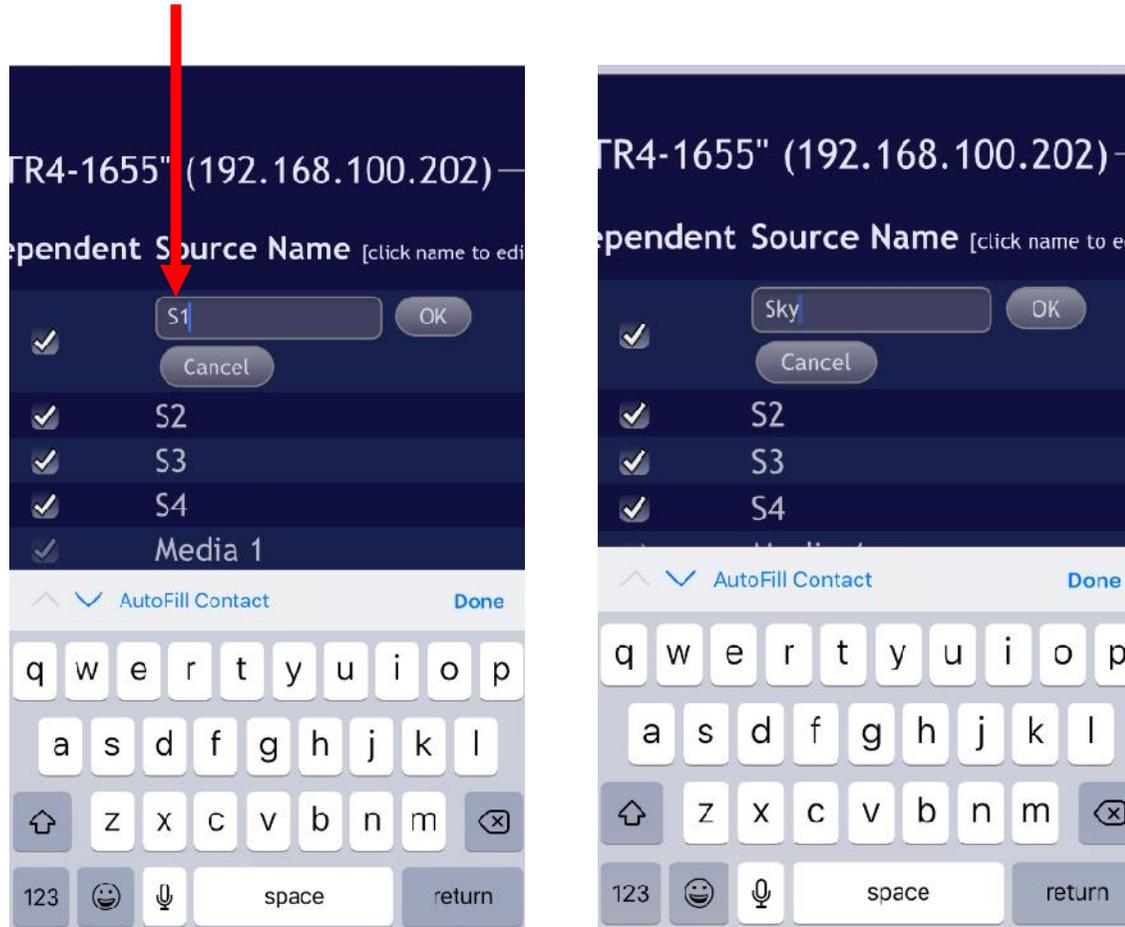

Repeat for each of the remaining sources until all your sources are re-named.

Untick unused sources so they are not displayed in the app.

