


Axiom Distributed Sources

Welcome to the Distributed Sources Section using an Axiom Mini4/1250 Amplifier & AMM

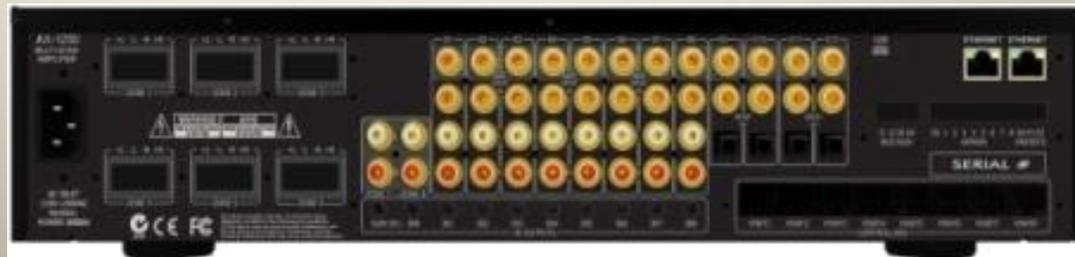

Axiom

Audio & Control Systems



Axiom Distributed Sources

Distributed Sources allow for all sources to be available across all amplifiers. It also allows you to select what source buttons are shown on your mobile app.

By default, Automatic Assignments is enabled meaning that all sources and stream buttons are visible in the mobile app.

The logo for Axiom, featuring the word "Axiom" in a sans-serif font. The letter "X" is replaced by a red circle with a white "X" inside, and a small red circle is positioned above the "i".

Audio & Control
Systems



Axium Distributed Sources

You may have only My Sky and a Blu-Ray player as sources connected to the amplifier and only require 4 network streams from the AMM so only those buttons need to be visible.

This can be achieved using the Distributed Sources table

Ensure your mobile device is connected to the same network as the Mini4/1250 and the AMM

Select the Axium app icon to launch




Axium

Audio & Control
Systems



Axiom Distributed Sources

The self discover Axiom template will load showing all sources and the AMM network streams

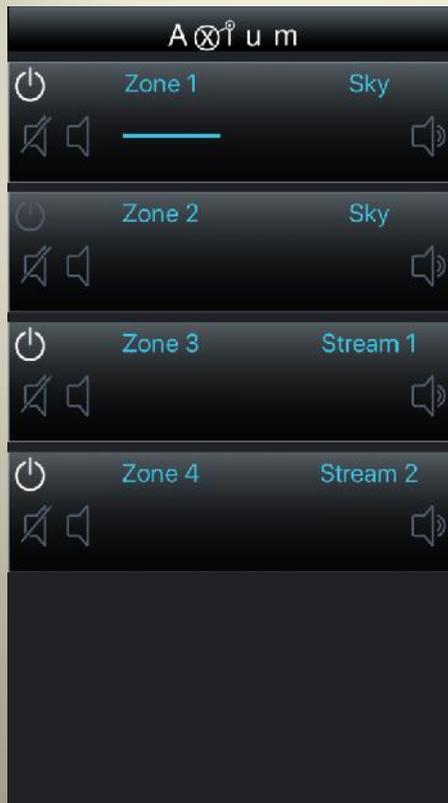

Axiom

Audio & Control
Systems




Axiom Distributed Sources


The self discover Axiom template will load showing sources and the AMM network stream layout. To edit the sources:




Select the Cog icon

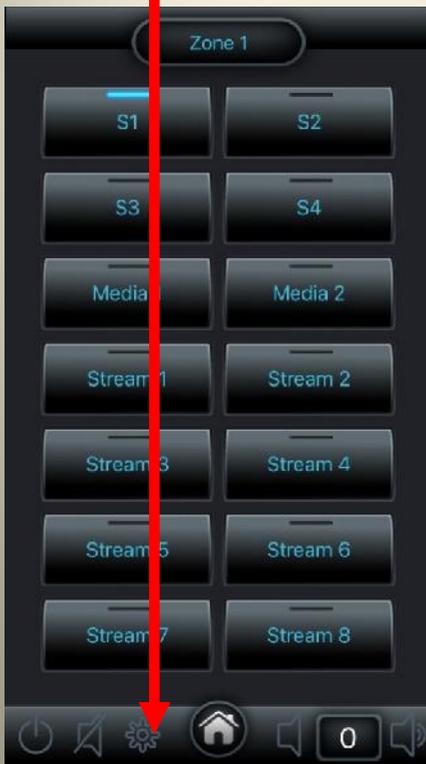

Press the Symbol

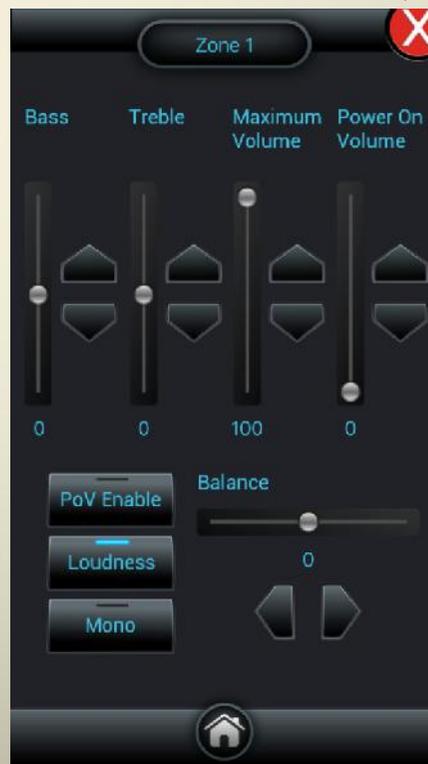

Select device config

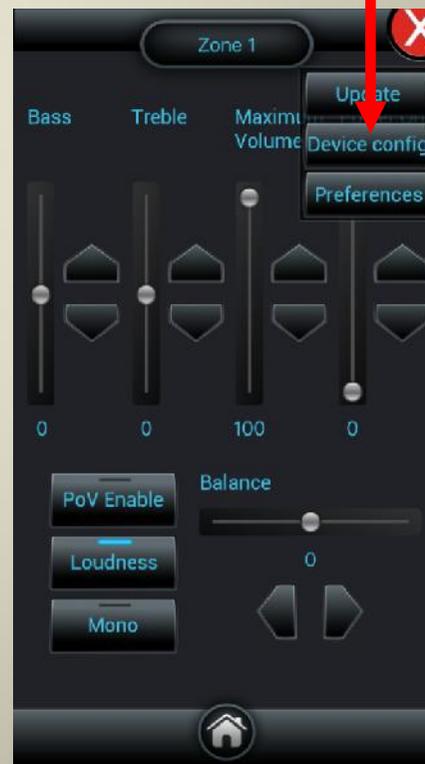

Audio & Control Systems



Axiom Distributed Sources

This will open the device settings page as below, select and press the Source button



Device Settings

Device Information

Model: AX-WiFi4 (version 2)
Unit ID: 1835
Manufacture Date: 20/11/2017
Firmware Version: 3.2
Temperature: 30.1 C (peak 31.1 C)
IP Address: 192.168.100.201
MAC Address: 10:07:33:42:85:84

Wired Ethernet - 192.168.100.202

Network Name: [input]
Connection: [input]

Date and Time

Date: 23/10/2019, 10:47:35
NTP Server: [input]
Observe DST: [input]

Third Party Support

PKK Interface: [input]
HDMI/WHILE AUDIO: [input]
Video In (C/E 1): [input]
Audio Source/Zone: [input]
Video Input 1: [input]
Video Input 2: [input]
Video Input 3: [input]
Video Input 4: [input]
Video Output 1: [input]
Video Output 2: [input]
Video Output 3: [input]
Video Output 4: [input]

Airplay

Enable Airplay: [input]

Digital Audio I/O

Source 3: [input]
Source 4: [input]

More Devices

AX-WiFi4 192.168.100.201 'wmm250' [input]

Automatic Assignments is enabled by default and all sources will be displayed on the mobile app.



Source Settings

Sources on AX-WiFi4 'STR4-1659' (192.168.100.202)

Source	Enabled	Independent	Source Name	Source
src 1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Sky	DOB
src 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Bluray	DOB
src 3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	S3	DOB
src 4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	S4	DOB
src 1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Media 1	DOB
src 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Media 2	DOB

Sources on AX-AW 'wmm250' (192.168.100.205)

Source Out	Enabled	Independent	Source Name
src out 1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Digital 1
src out 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Digital 2
src out 3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Digital 3
src out 4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Digital 4
dst out 1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Stream 1
dst out 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Stream 2
dst out 3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Stream 3
dst out 4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Stream 4
dst out 5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Stream 5
dst out 6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Stream 6
dst out 7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Stream 7
dst out 8	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Stream 8

Distributed Sources

Allow automatic assignments:

Distributed Source	Device	Source
1	[input]	[input]
2	[input]	[input]
3	[input]	[input]
4	[input]	[input]
5	[input]	[input]
6	[input]	[input]
7	[input]	[input]
8	[input]	[input]
9	[input]	[input]
10	[input]	[input]
11	[input]	[input]
12	[input]	[input]
13	[input]	[input]
14	[input]	[input]
15	[input]	[input]
16	[input]	[input]
17	[input]	[input]
18	[input]	[input]
19	[input]	[input]
20	[input]	[input]
21	[input]	[input]
22	[input]	[input]



Audio & Control Systems



Axiom Distributed Sources

This example is only requiring two sources on the Mini4 and four network streams on the AX-AMM we can disable the source buttons that are not required.




Audio & Control
Systems




Axiom Distributed Sources

Un-select the sources that are not used by clicking on the corresponding tick to disable those sources.

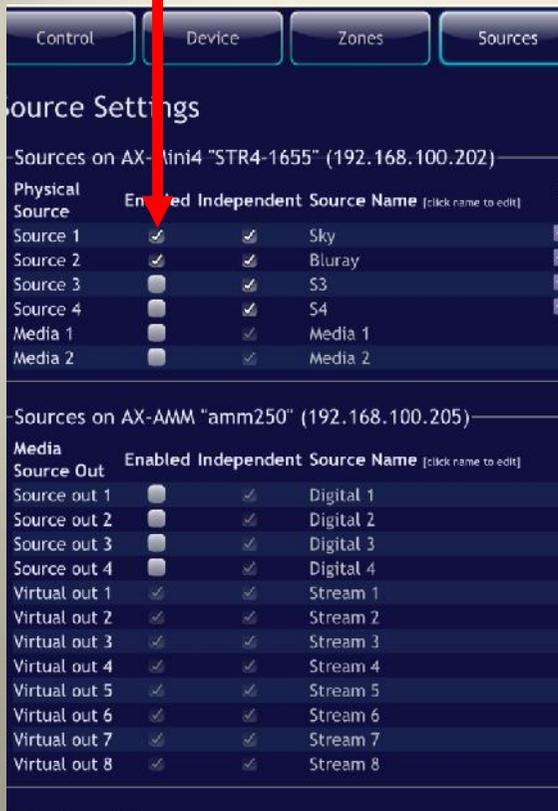

The Mobile app will display only those two sources required

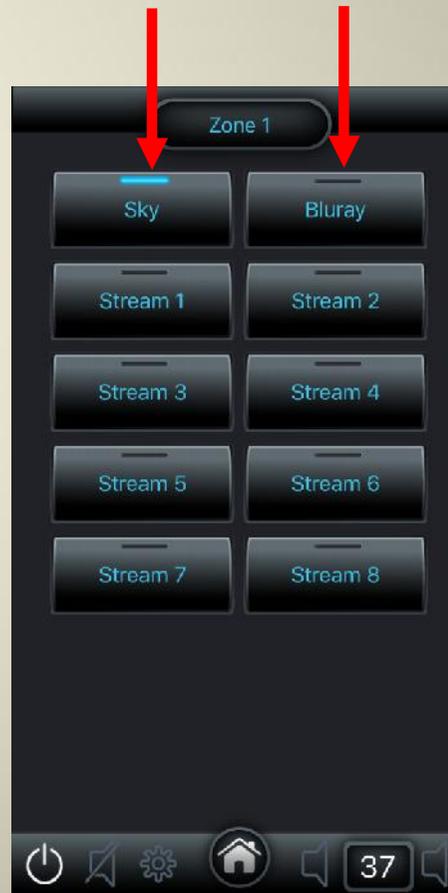


Audio & Control Systems



Axiom Distributed Sources

We now need to edit the amount of Streams as in the example we only require 4 streams

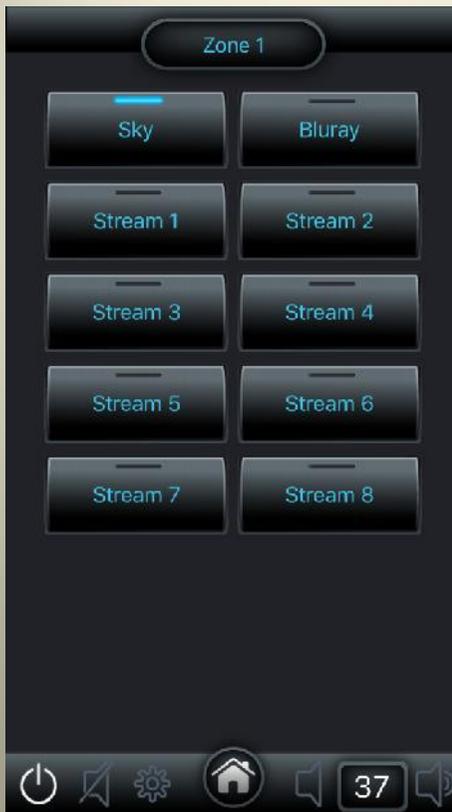

Scroll down to Distributed Sources and untick Allow Automatic Assignments



Audio & Control Systems



Axiom Distributed Sources

The Device for source 1 now displays AMM and the source displays Stream 1



From the Menu, select the AMM then click done



Audio & Control Systems



Axiom Distributed Sources

The Device for source 2 now displays AMM and the source displays Stream 2

Repeat the above steps to included Stream 3 and Stream 4



Once all the changes have been completed, close this app.




Audio & Control Systems




Axiom Distributed Sources

Re open the Axiom Mobile app and select the source button.

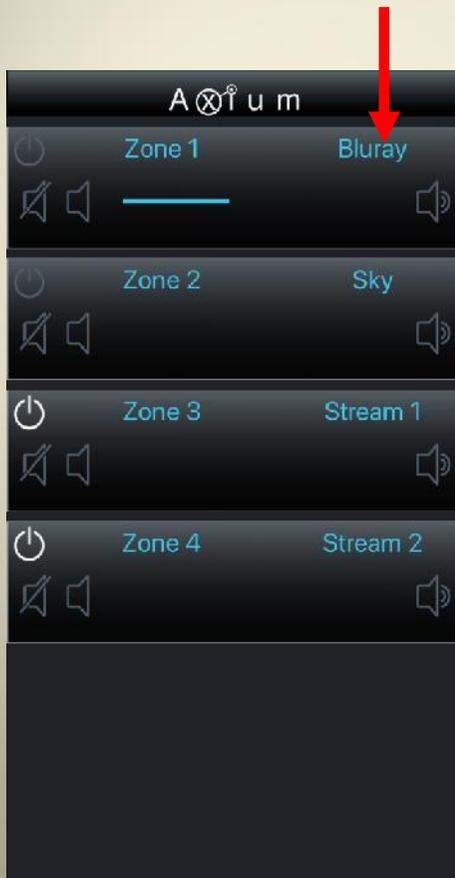

Your changes will then appear showing your required source buttons.

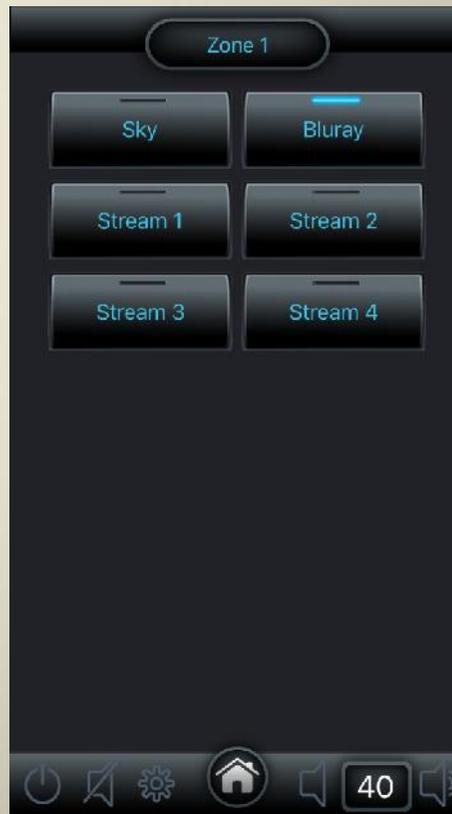

Axiom

Audio & Control
Systems

