

# Welcome to the Amazon Alexa Axium setup procedure guide

Axiu m



amazon alexa

Axiu m

Audio & Control  
Systems



# Axium configuration

In order to associate the Alexa user account with the Axium system, the account must be linked to the system. This process is managed on the configuration webpage of the Media Manager (AMM) in the Axium system.

If you know the url of the AMM webpage you may skip the next step (accessing from the mobile app), and go to page 5.

The Axium logo features the word "Axium" in a sans-serif font. The letter "x" is replaced by a red circle with a white "x" inside, and a small red square is positioned above the dot of the "i".

Audio & Control  
Systems




# Axium mobile app – config webpage


Open your Axium mobile app on your device. Enter the config setup web browser by firstly selecting a source from the home page on the Axium mobile app that will take you to the sources page as shown in fig 1.




Select the Cog icon  
Fig 1

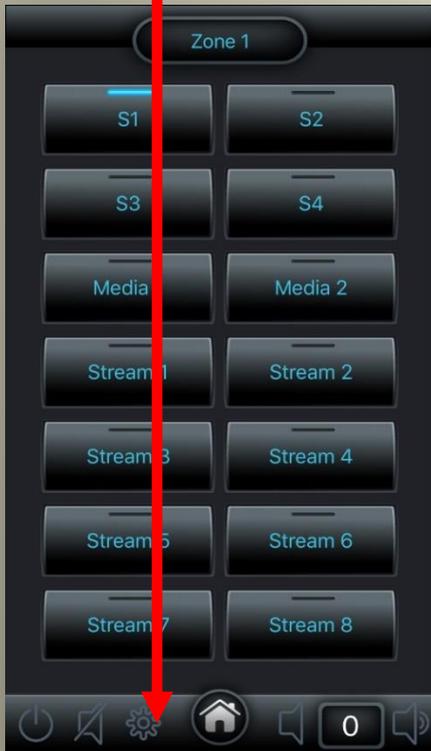

Press the Symbol

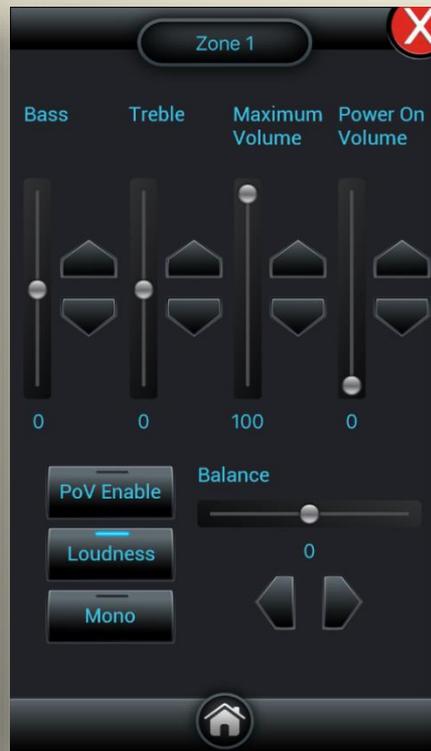

Select device config

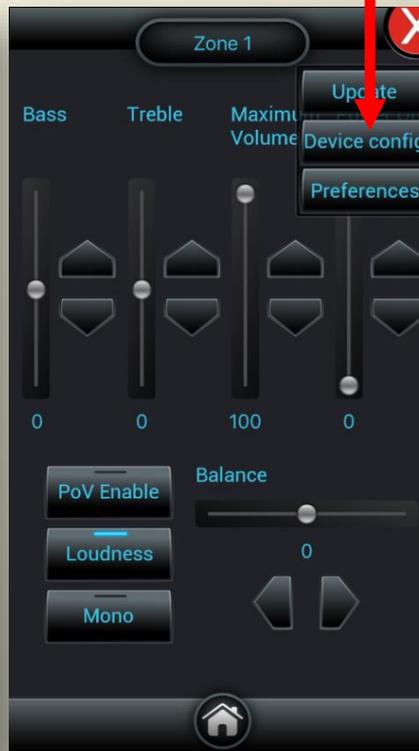

Audio & Control  
Systems



Once in the config page, scroll to the bottom to see the AMM listed and click on the configure button



Wired Ethernet - 192.168.100.111

Network Name: lunar

Connection: Automatic Configuration (DHCP)

KNX Interface: Disabled

Date and Time

Date: 01/03/2018, 12:49:59

NTP Server: oceania.pool.ntp.org

Observe DST:

Digital Audio I/O

Source 3: Digital Input

Source 4: Digital Output Media 2

More Devices

AX-AMM	192.168.100.135	"amm99995"	Configure
AX-1250	192.168.100.110	"ax1250"	Configure
AX-4Z1P7IN	192.168.100.106	"Dantooine"	Configure

© Copyright 2011-2018 [Audio Engineering Ltd.](#) All rights reserved.





Now click on the services tab button.



The screenshot displays the AXium web interface with the 'Services' tab selected. The interface is divided into several sections:

- Control** (selected), **Device**, **Zones**, **Sources**, **Connections**, **Services**, **Management**
- Device Settings**
  - Device Information**

Model	AX-AMM
Unit ID	38628
Manufacture Date	30/11/2016
Firmware Version	1.1.5 beta 1
Temperature	37° C (peak 40° C)
IP Address	192.168.100.135
MAC Address	3E:6B:6C:AB:34:96
  - Wired Ethernet - 192.168.100.135**

Network Name	swm0000
Connection	...
  - Date and Time**

Date	01/03/2018, 12:50:33
Time Zone	...
  - More Devices**

AX-1250	192.168.100.110	"ax1250"	<a href="#">Configure</a>
AX-Mini4	192.168.100.111	"lunar"	<a href="#">Configure</a>
AX-865	192.168.100.106	"Dantooine"	<a href="#">Configure</a>
- Device Information**

This contains specific information about this device including network name and ID, date of manufacture, firmware version, current and peak temperatures and MAC address.
- Wired Ethernet**


Configure this device for DHCP or a static IP. Static IP settings will appear when Static is selected in the dropdown.

© Copyright 2011-2018 [Audio Engineering Ltd](#). All rights reserved.


Audio & Control  
Systems



Alexa will be displayed - you need to login with the intended Amazon account to continue.  
Select the Login with Amazon button

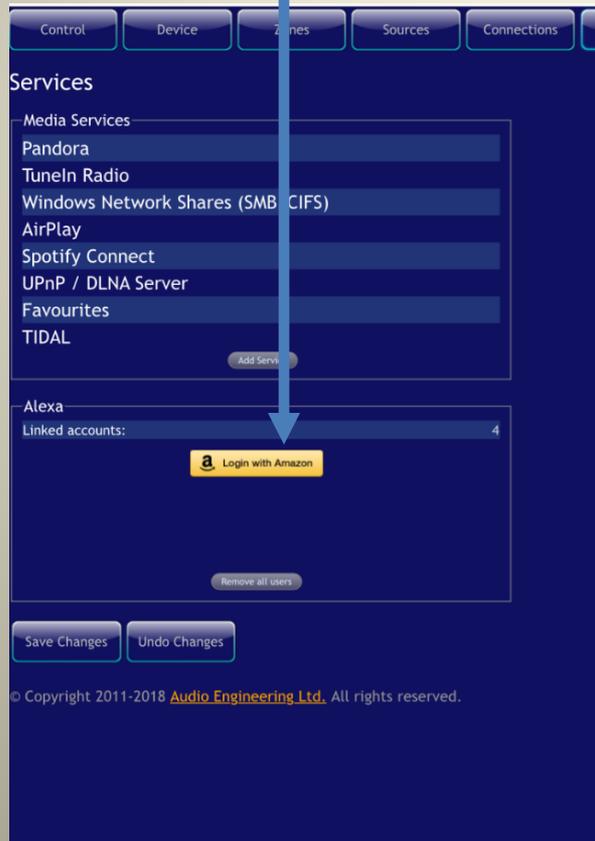

Sign into your account

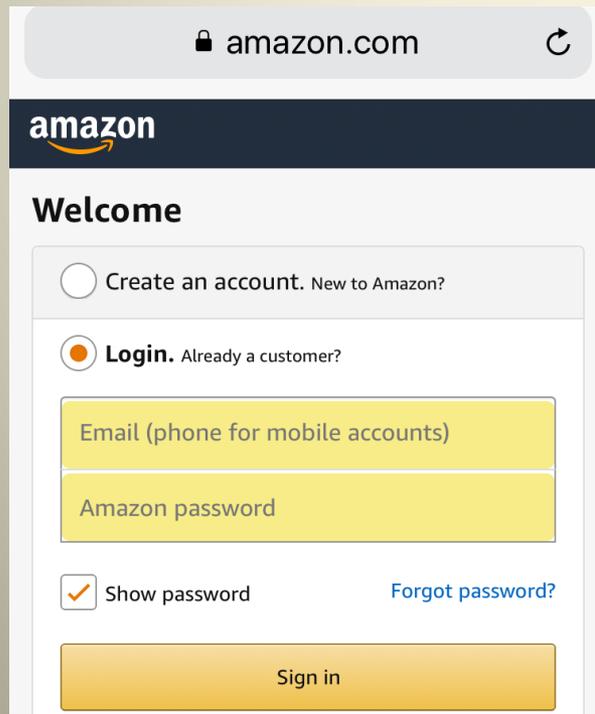

The image shows a screenshot of the Amazon sign-in page. At the top, the browser address bar displays "amazon.com" with a lock icon and a refresh button. Below the address bar is the Amazon logo. The main heading is "Welcome". There are two radio button options: "Create an account. New to Amazon?" (unselected) and "Login. Already a customer?" (selected). Below these are two input fields: "Email (phone for mobile accounts)" and "Amazon password". There is a checkbox for "Show password" which is checked, and a link for "Forgot password?". At the bottom is a yellow "Sign in" button.

Axiom

Audio & Control  
Systems



Once done, the AMM and your Amazon Alexa account will now be linked. The number of linked accounts shown will increase, reflecting the account association.



Audio Engineering Ltd. logo featuring a stylized 'X' in a red circle.

Audio & Control  
Systems



Now if the Axium skill is installed and linked with Amazon, then you should be able to now inform Alexa about the Axium zones in the system. This can be done saying "Alexa, discover devices", or by using the interface provided by the Alexa app or webpage.

For sample directives go to page 22.

Axium

Audio & Control  
Systems



If the Axiom skill is not found in the Amazon store of your region:

Amazon hides skills from regional stores if they do not provide a translation for the primary language used there.

Please contact us if you would like to help translate into a specific language that Amazon Alexa supports.


If you wish to proceed with using the skill using English instead, the next several pages describe how to get the skill by setting the Amazon account region to the US and using the English US locale.

Axiom

Audio & Control  
Systems



On your PC, log into Amazon.com. It is important that you check that you are connected to the .com USA site. To check this expand the Accounts & List tab

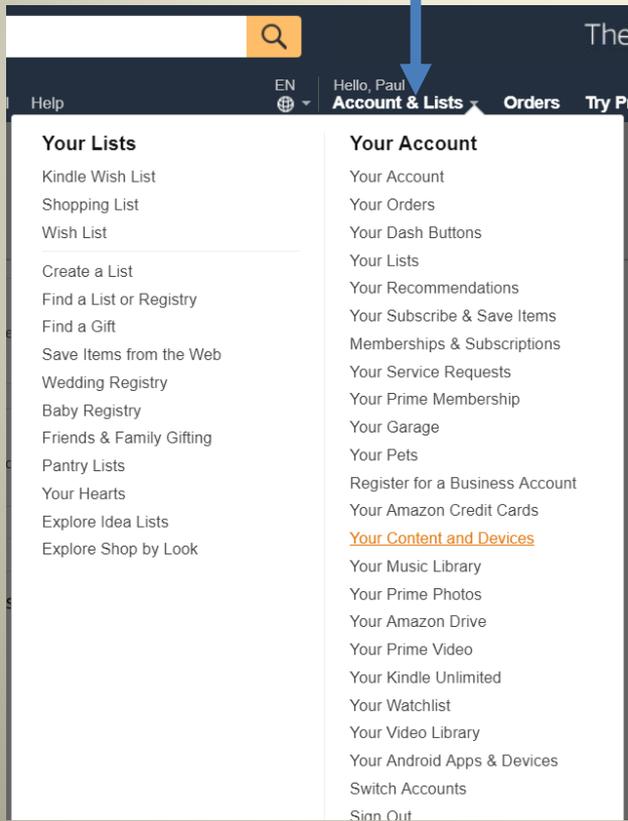


Axiom

Audio & Control  
Systems



Then click on Your Content and devices

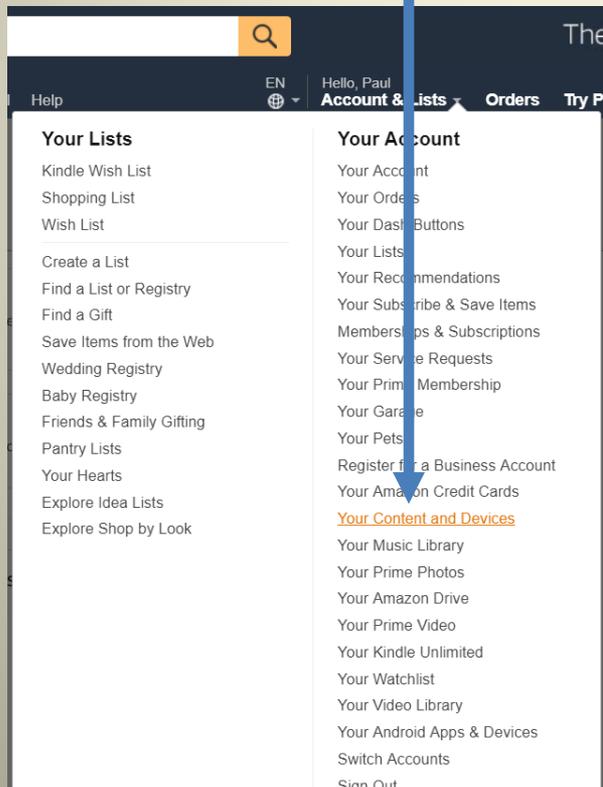


AudioXium

Audio & Control  
Systems



Now select the Settings Tab

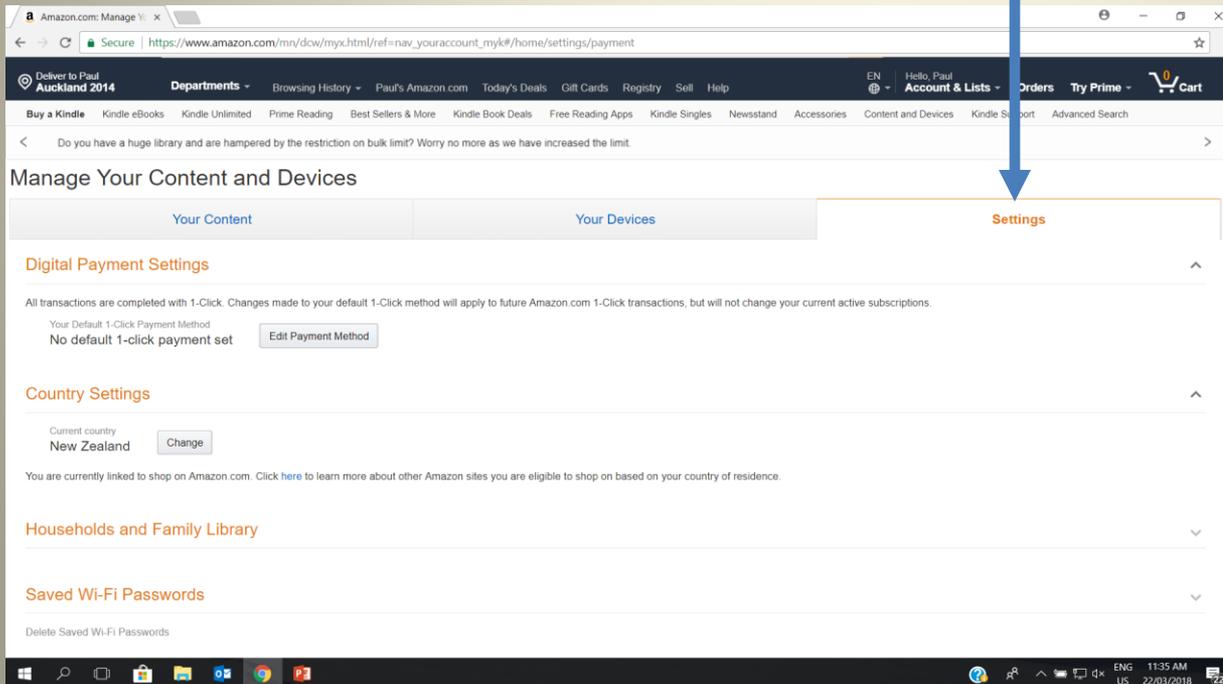


Axiom

Audio & Control  
Systems



Then click on Country settings. It will then display what shop you are linked to, this needs to be the Amazon.com shop.

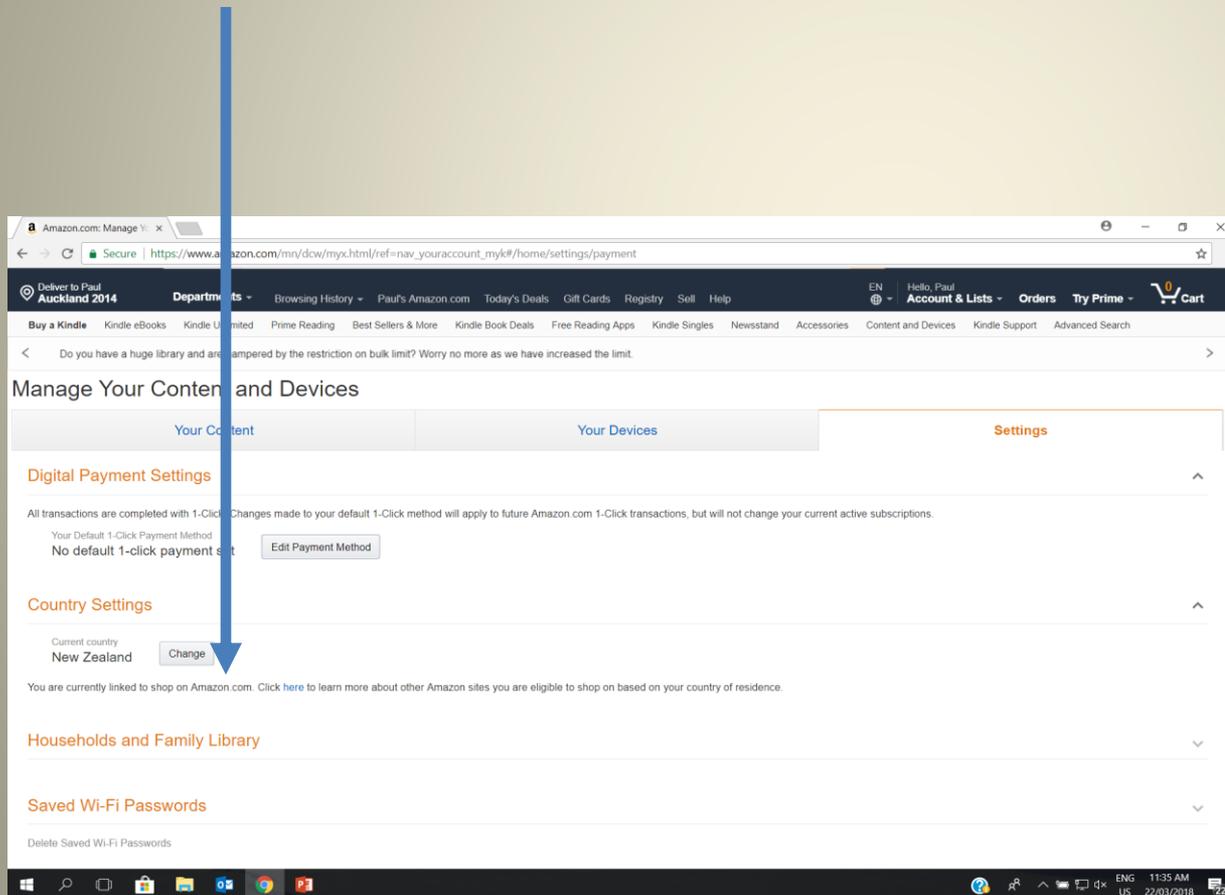


Axiom

Audio & Control  
Systems



In your browser go to [www.alexam.amazon.com](http://www.alexam.amazon.com).  
This will direct you to the home page.

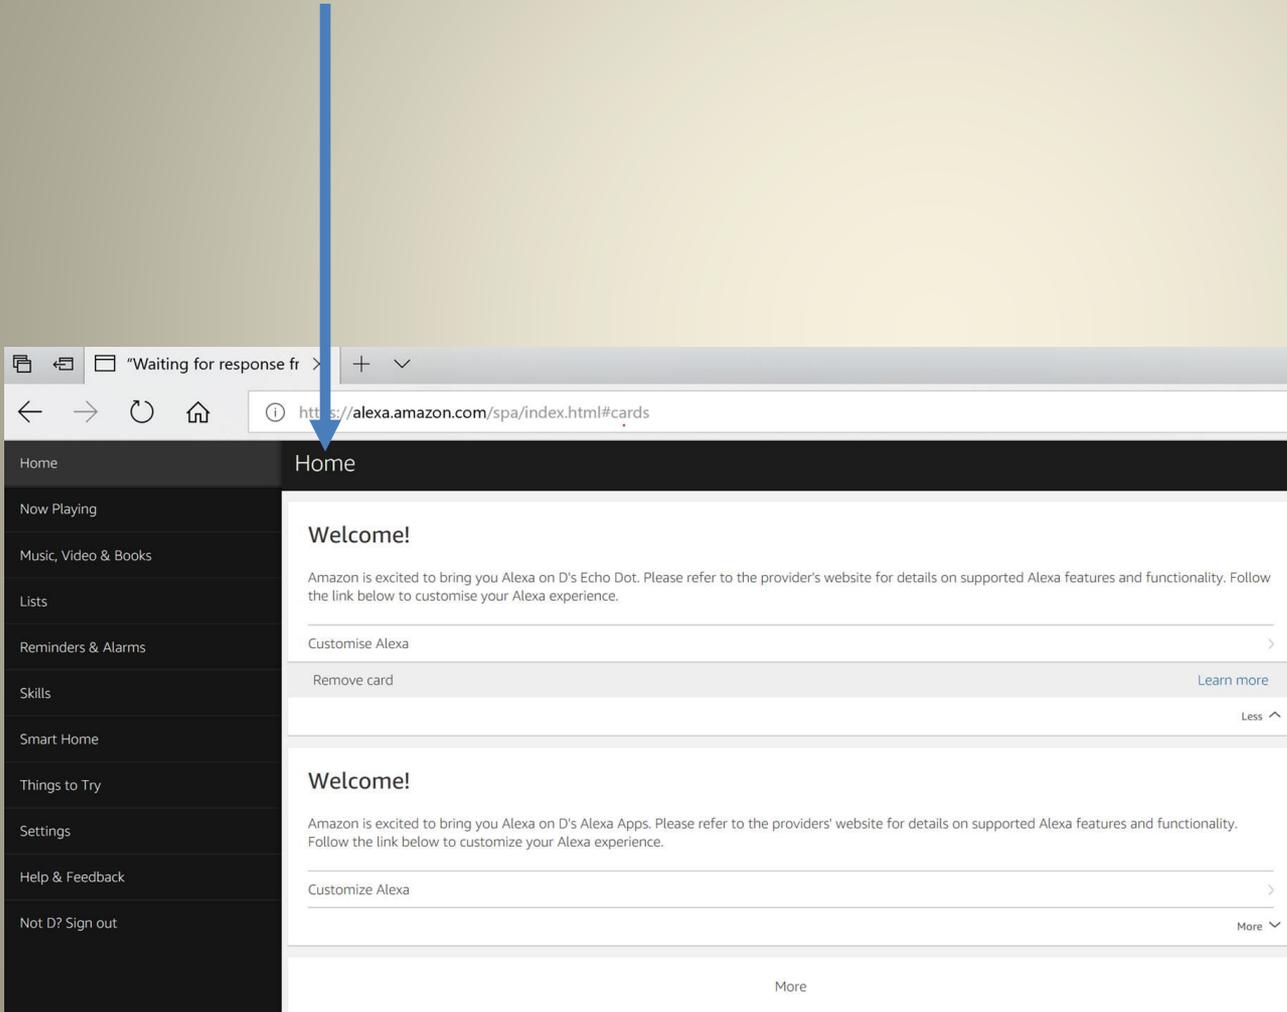


Axiom

Audio & Control  
Systems



Click on the settings tab

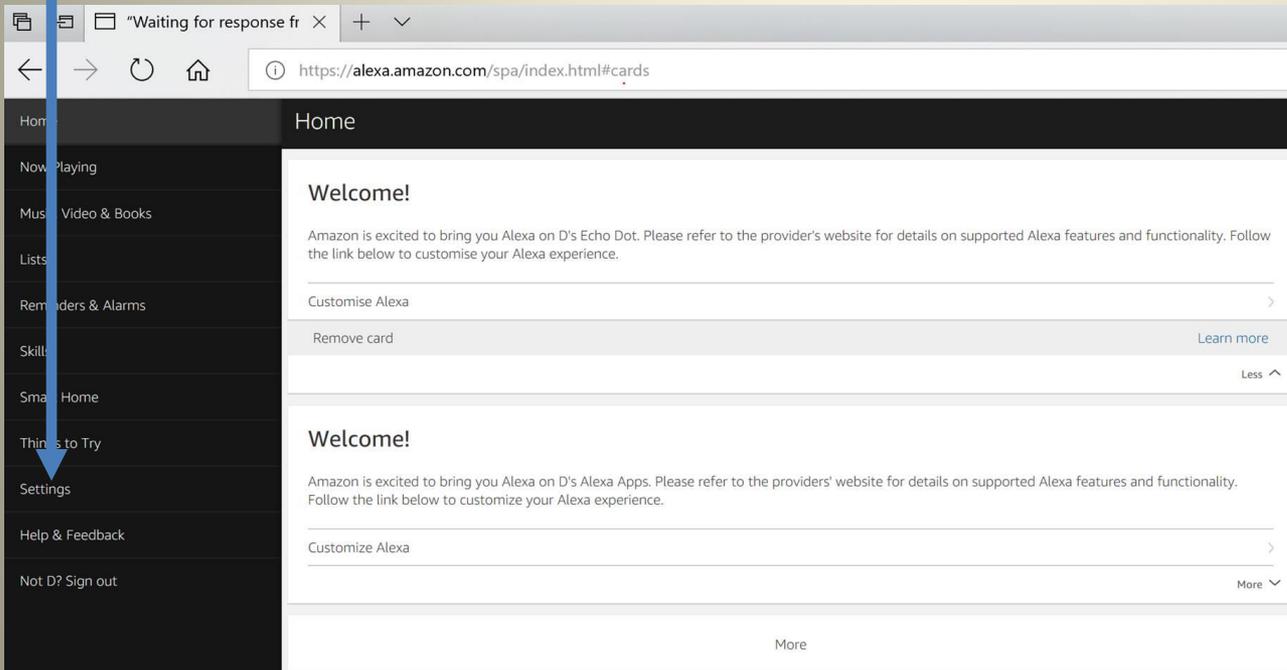


Axiom

Audio & Control  
Systems



Now select the device being used as the Alexa voice assistant. In this case it is an Echo Dot.

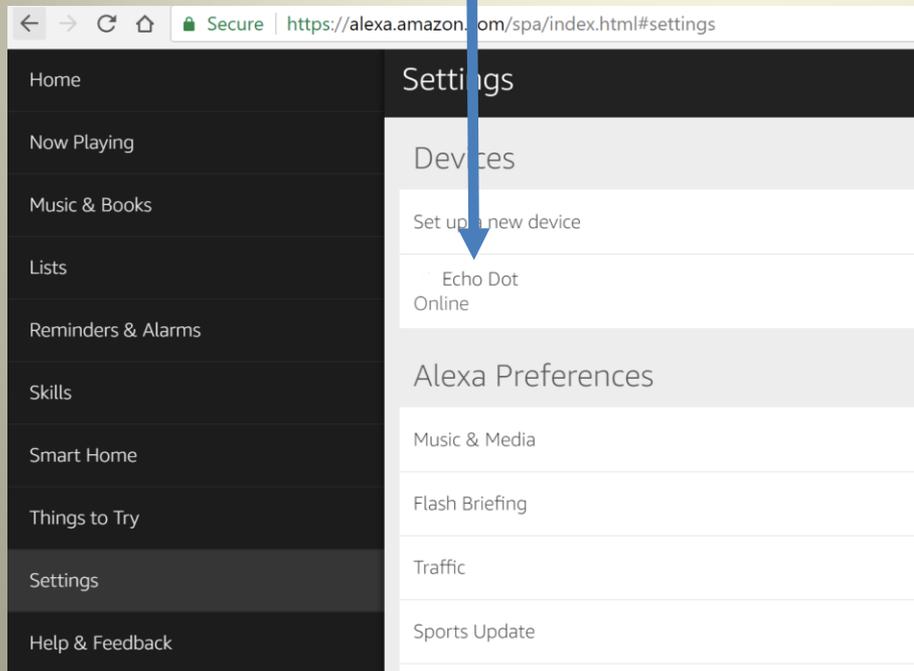


Axiom

Audio & Control  
Systems



Scroll down to the Language area and ensure it is set to English (United States)

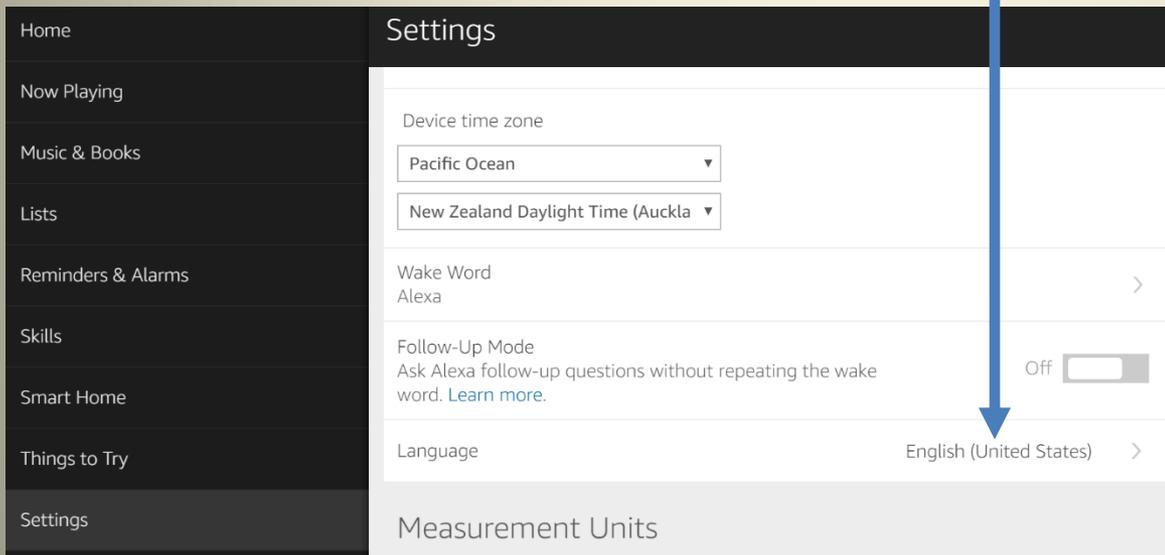


Axiom

Audio & Control  
Systems



Now click on the Skills tab

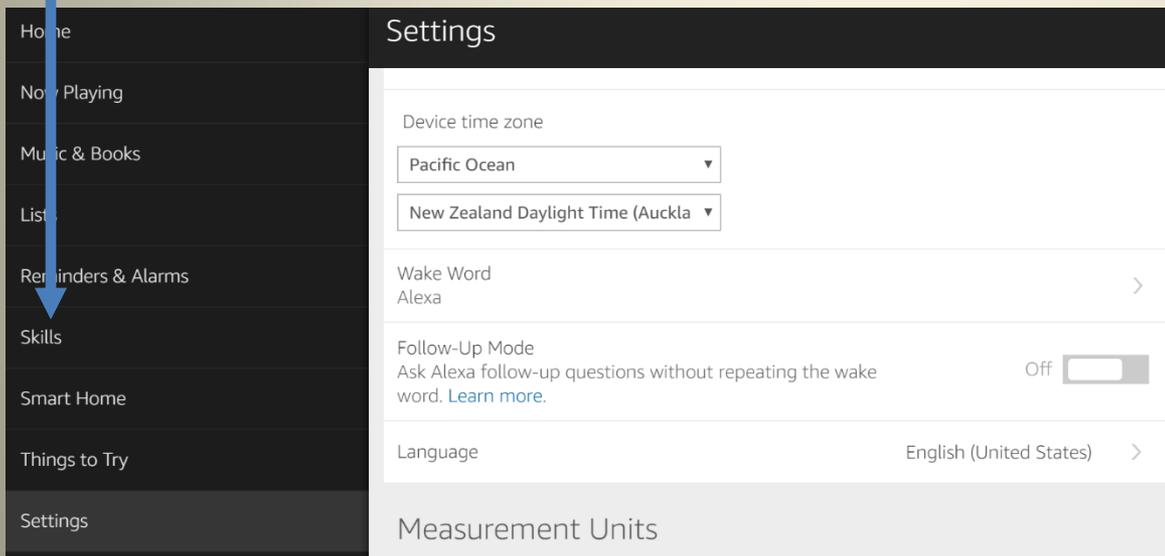


Axiom

Audio & Control  
Systems



Click on the Skills tab and search for the Axiom Skill. Once found you will be told to link the skill with your account.

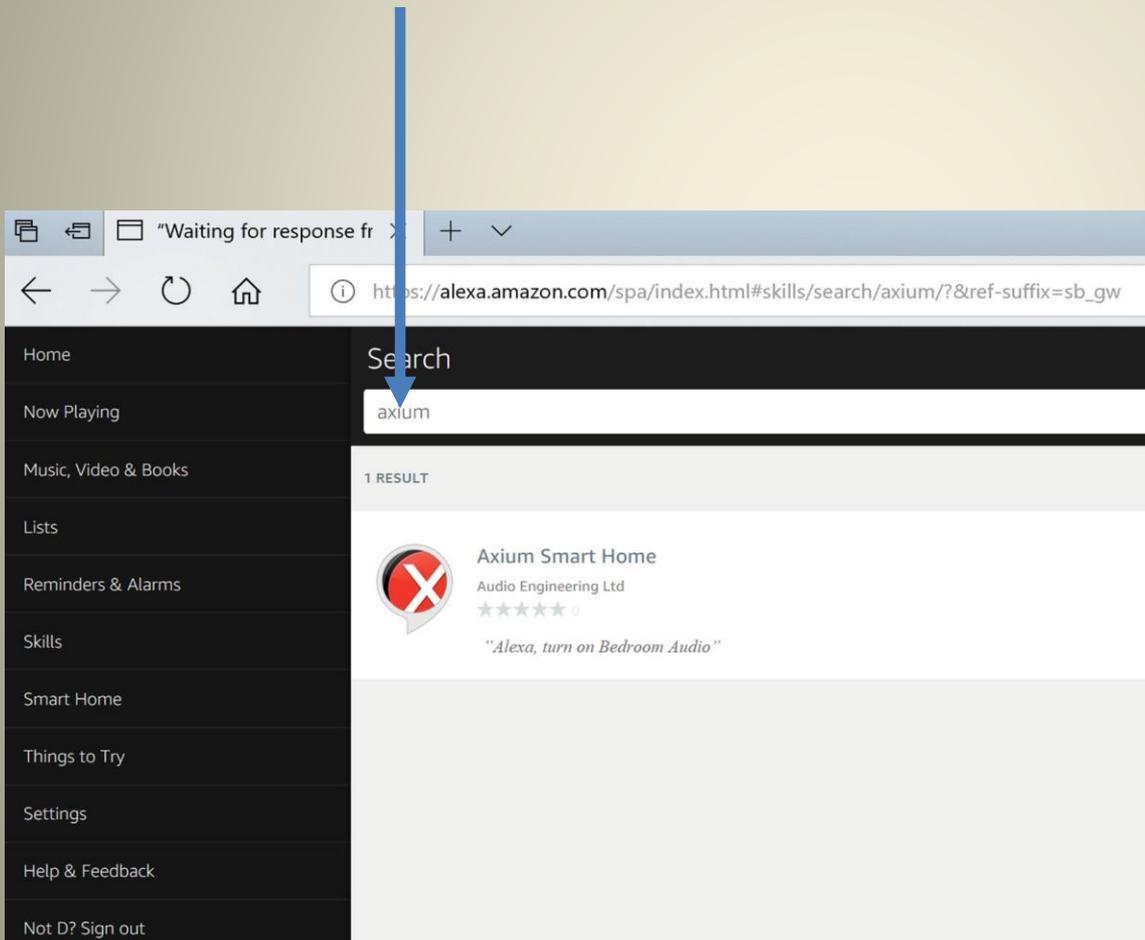

# Axiom

Audio & Control  
Systems



The prompted link starts discovering devices once completed.



Home	Devices
Now Playing	
Music & Books	REAR DECK AXMINI4 audio zone
Lists	
Reminders & Alarms	BED DECK AXMINI4 audio zone
Skills	DINE DECK AXMINI4 audio zone
Smart Home	GYM AX1250 audio zone
Things to Try	MEDIA ROOM AXMINI4 audio zone
Settings	
Help & Feedback	MASTER BED AX1250 audio zone
Not D? Sign out	FAMILY AX1250 audio zone

AXIUM

Audio & Control  
Systems



Once the above processes have been completed, use the Alexa voice directives with your Axium system.

Some sample commands:

alexa, turn on/off Bedroom Audio

alexa, un/mute the Lounge

alexa, turn up the volume by 20 on Kitchen Audio

alexa, turn down the volume on Kitchen Audio

alexa, set the volume of Kitchen Audio to 40

alexa, change the input/source on the Lounge to Stream 1

alexa, next/previous track/song on the Lounge

alexa, pause/resume the Lounge

alexa, play on the Lounge

alexa, stop the Lounge

*the zone name can be often be omitted if a recently used directive provided the context. Otherwise Alexa will likely ask which device for clarification.*

Axiu m

Audio & Control  
Systems



If you need to remove access to an account from the Axium side – use the Remove all users button, or perform a factory reset in the webpage.

Unlinking the account used in the skill will also remove access, but it does not disassociate the AMM from the account.



Audio & Control  
Systems

